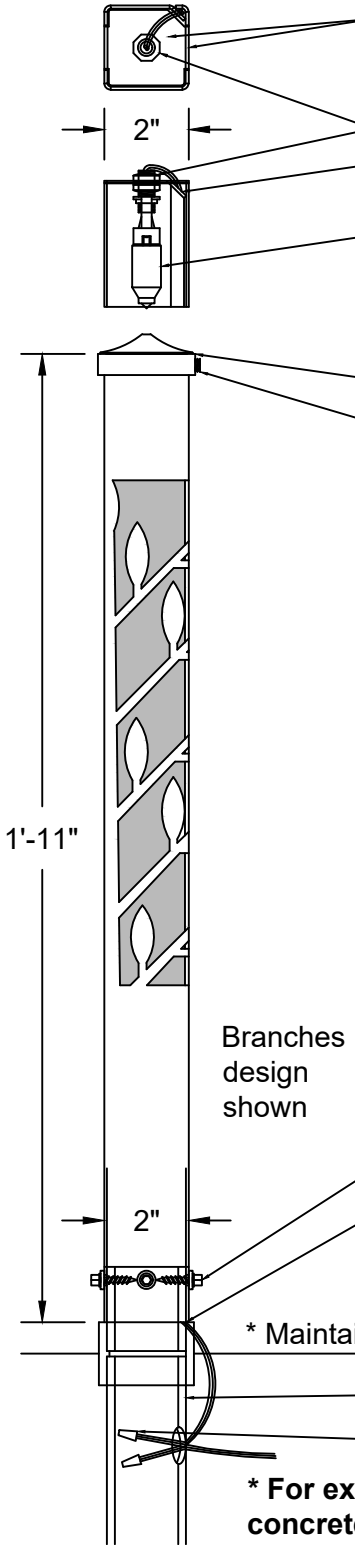


Stainless steel plate (with socket assembly) rests in slots in 2x2 top
- 2x2 cap will hold down plate and in place after set screw is tightened
**- Check cap alignment while tightening set screw to level cap**

Socket assembly with bipin lamp supported on plate resting on 2x2 top

Feed lead wires into corner wire chase
- Do not twist wires or the fit may be difficult

Long bipin LED lamp shown, adjust tip of LED lamp to be just above design space
- Raise lamp/socket to avoid glare
- Adjust socket bracket on brass lamp rod for different size lamps
- Use Attraction Lights recommended LED lamps for best shadow pattern lighting

2" cast iron cap

1/4" set screw secures cap with1/8" hex key
**- Check cap alignment while tightening set screw to level cap**

## New 2x2 Series for 2019

- Design graphics on all 4 sides
- New simplified socket and stake mounting
- 16 g steel (.060)


## Attraction Lights, LLC

Lyle Braund - Design & Sales
Questions: Call me at 970-316-0019
lyle@attractionlights.com
www.AttractionLights.com


Branches design shown

Hex screws secure ABS coupling to 2x2 base

Lead wires from socket exit base corner of 2x2
**- Leave extra wire near fixture base so socket can be raised to make future change of LED lamp easier**

* Maintain soil and mulch below metal base of 2x2 or Lifetime guarantee will be void

ABS pipe (1.5" x 10") sides into ABS coupling secured to 2x2 base

Make up wire connections and house inside of ABS pipe/stake

*** For extra stability of 2x2 on stake - backfill stake hole bottom with concrete and glue ABS pipe into ABS coupling**