


G4 Bipin Lamp:
4x4x25"
4x4x17"

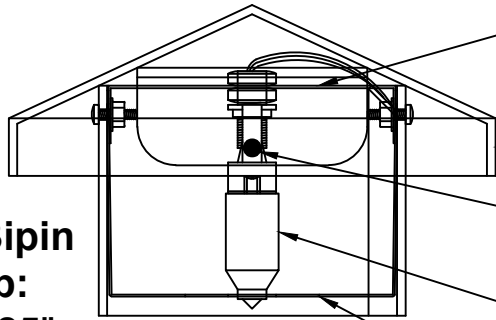

Stainless steel socket bracket supports socket assembly with LED bipin lamp

- Install Attraction Lights recommended LED lamps for best shadow pattern lighting
- Socket lead wires routed thru lamp rod, into wire way or wire pipe, and out 4x4 base
- Bracket slot ends rest on 2 screws with flange nuts supporting the top enclosure plate

6" Cap with bracket welded on underside to secure and center cap on 4x4

- Set screw pushes against cap bracket to secure - see #7B below

Set screw (1 - 1/4x20x3/8") position on 4x4 tube - hex key (1/8") supplied

- Secures cap on 4x4 by pushing against cap bracket
- Note: Start set screw before setting cap

G4 bipin LED lamp mounting: Adjust tip of LED lamp to be just above 4x4 design space

- Lamp nose typically sits in 5/8" hole in top enclosure plate
- Raise lamp/socket to avoid glare

Stainless steel top enclosure plate protects lamp in 4x4 top

- Plate hangs from 2 screws with flange nuts (#10 x 24 x 1/2")
- Remove knockout ring (1.80") for MR16 lamps. The 5/8" hole is for G4 bipin lamps

**Top Details
4x4 Series**

4x4 Series Installation Guide


- Top details

- Download/View pdf on website's Resources page - Installation Guides - 4x4 Series

Attraction Lights, LLC - 970-316-0019

AttractionLights.com - info@AttractionLights.com

MR16 Lamp:
4x4x37"
4x4x25"
4x4x17"

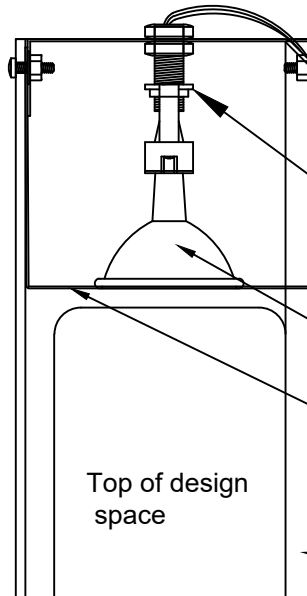

10x24x1/2" Phillips screws pass thru holes (2) in 4x4 and thread into #10 flange nut

- Top enclosure plate hangs on these 2 screws
- Thread screws onto flange nuts and leave loose for socket bracket to slide between
- Tighten screws to secure socket bracket holding socket

Socket assembly adjustable for best area lighting and to avoid glare

Adjustment options:

- Rotate threaded lamp rod threaded into ceramic socket support bracket
- Move nuts on lamp rod and re-secure on socket bracket spanning top of 4x4
- Fine tune position by bending socket bracket

MR16 LED Lamp mounting: Lamp typically rests in top enclosure plate 1.80" hole

- Raise lamp/socket to avoid glare

Top enclosure plate (stainless steel) with knockout ring for MR16 lamp

- See details above

Formed wire way (or wire pipe) routes lead wires to base for connection to power